

Topaz Series



Specifically designed for reliability, energy efficiency, and ease-of-use, there are thousands of Topaz PSA Oxygen Generators currently in use throughout the world. The Topaz's ability to deliver up to 95.5% oxygen concentration make it a great fit for a wide range of commercial applications.

Features

- Self-contained (includes air compressor)
- Heavy duty metal enclosure
- Wall or rack-mount design
- Advanced Engineering
- Ozone/high temperature process tubing
- Quick release fittings for ease of maintenance
- Optional oxygen concentration monitor

Typical Applications

Manufacturing

- Jewelry/Brazing/Soldering
- Thermal/Chemical Oxidation

Artistic

- Glass Work/Blowing

Environmental

- Ozone (Generator) Feed Gas
- Environmental Remediation
- Waste/Water Treatment


Additional

- Fish Farming

Specifications

	Topaz	Topaz Plus	Topaz Ultra
Product Characteristics			
Product Flow ¹	6 LPM (12 SCFH)	8 LPM (17 SCFH)	10 LPM (21 SCFH)
Product Pressure	9 psig (62 kPa)	20 psig (138 kPa)	20 psig (138 kPa)
Product Concentration (nominal)	93%	93%	90%
Product Dew Point	-100°F (-73°C)	-100°F (-73°C)	-100°F (-73°C)
Dimensions (W x D x H) (nominal)	19 x 10 x 27 in (48 x 25 x 68 cm)	19 x 10 x 27 in (48 x 25 x 68 cm)	19 x 10 x 27 in (48 x 25 x 68 cm)
Weight	53 lb (24 kg) [Add 2 lb (0.9 kg) for 220 V ~ unit] [Add 20 lb (9 kg) for Stainless]	56 lb (25 kg) [Add 4 lb (0.9 kg) for 220 V ~ unit] [Add 20 lb (9 kg) for Stainless]	58 lb (26 kg) [Add 4 lb (0.9 kg) for 220 V ~ unit] [Add 20 lb (9 kg) for Stainless]
Physical Connection Product Gas Outlet	¼" NPT-M/B-M size oxygen adapter	¼" NPT-M/B-M size oxygen adapter	¼" NPT-M/B-M size oxygen adapter
Ambient Operating Conditions	Locate the oxygen generator in a well-ventilated area that is protected from weather elements and remains between 40°F (4°C) and 104°F (40°C)		
Control Power Requirements (Single Phase)	100V ~ ±10%, 50 or 60 Hz, 5.5 A 220V ~ ±10%, 60 Hz, 5.0 A 220V ~ ±10%, 50 Hz, 2.5 A	120V ~ ±10%, 60 Hz, 5.0 A 220V ~ ±10%, 50 Hz, 2.5 A	120V ~ ±10%, 60 Hz, 6.0 A 220V ~ ±10%, 50 Hz, 3.0 A

¹ LPM (Liters per minute) gas measured at 1 atmosphere and 21°C / SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F

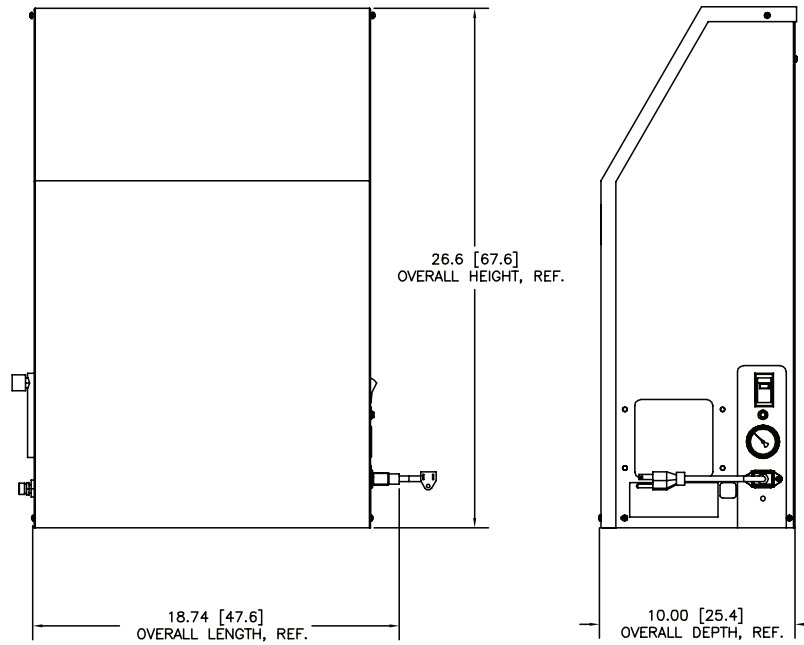

Ordering Information

Note: All dimensions are nominal.

Model	Part Number	Description
Topaz	AS013-105	120 V ~ ±10%, 60 Hz, with painted aluminum enclosure
	AS013-106	220 V ~ ±10%, 50 Hz, with painted aluminum enclosure
	AS013-107	220 V ~ ±10%, 60 Hz, with painted aluminum enclosure
	AS013-115	120 V ~ ±10%, 60 Hz, with stainless steel enclosure
	AS013-120	220 V ~ ±10%, 50 Hz, with stainless steel enclosure
	AS013-124	120 V ~ ±10%, 60 Hz, with painted aluminum enclosure & oxygen concentration monitor (LED indicator)
	AS013-125	220 V ~ ±10%, 50 Hz, with painted aluminum enclosure & oxygen concentration monitor (LED indicator)
Topaz Plus	AS018-101	120 V ~ ±10%, 60 Hz, with painted aluminum enclosure
	AS018-102	220 V ~ ±10%, 50 Hz, with painted aluminum enclosure
	AS018-110	220 V ~ ±10%, 60 Hz, with painted aluminum enclosure
	AS018-111	120 V ~ ±10%, 60 Hz, with stainless steel enclosure
	AS018-115	220 V ~ ±10%, 60 Hz, with stainless steel enclosure
Topaz Ultra	AS123-1	120 V ~ ±10%, 60 Hz, with painted aluminum enclosure
	AS123-2	220 V ~ ±10%, 50 Hz, with painted aluminum enclosure
	AS123-3	220 V ~ ±10%, 50 Hz, with stainless steel enclosure
	AS123-4	120 V ~ ±10%, 60 Hz, with stainless steel enclosure

Shipping Information	Topaz	Topaz Plus	Topaz Ultra
Class	92.5	92.5	92.5
Commodity Classification Number	8421.39.8040	8421.39.8040	8421.39.8040
Dimensions (W x D x H)	21 x 12 x 29 in (53 x 31 x 74 cm)	21 x 12 x 29 in (53 x 31 x 74 cm)	21 x 12 x 29 in (53 x 31 x 74 cm)
Gross Weight	61 lb (28 kg) [Add 4 lb (1.8 kg) for 220 V ~unit] [Add 20 lb (9 kg) for Stainless]	64 lb (29 kg) [Add 4 lb (1.8 kg) for 220 V ~ unit] [Add 20 lb (9 kg) for Stainless]	66 lb (30 kg) [Add 4 lb (1.8 kg) for 220] [Add 20 lb (9 kg) for Stainless]

Warranty: 1 Year Parts and Factory Labor*

* An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator not covered under warranty.

All performance ratings based on an ambient temperature up to 100°F (38°C), up to 1,000 feet elevation, and 80% relative humidity.

Copyright (C) 2013 Chart Industries
 CAIRE Inc./Chart SeQual Technologies Inc./Chart Inc./AirSep Corp. reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence.
 All rights not expressly stated herein are reserved by us, as applicable.



A Chart Industries Company

260 Creekside Drive

Buffalo, NY 14228-2075 U.S.A.

Tel: (716) 691-0202 • Fax: (716) 691-1255

www.airsepcpd.com • cpd@airsep.com

ML-IND0001 A